

Ex-Resistance Temperature Detector BWR15 model 8 (2GoH)

for areas exposed to firedamp (mining)

In general



The temperature sensors manufactured by Reckmann GmbH (R58®) are solely intended for the measurement of process temperatures in solid, liquid and gaseous media. This design (without neck tube) allows a direct screwing into the process connection of a container or a pipeline.

Application area:

Plant engineering for mining technology

Ignition protection marking: I M2 Ex ia I Mb.

Ambient temperature at connection head max. - 40° C to + 80° C.

Max. surface temperature 150 °C on all surfaces where pulverized coal can deposit as a layer.

For installation please see our operating instructions.

Stock-number-code: BWR 15-C.

Technical datas

- **Connection head** (fig. 1/1) according to DIN EN 50446.
Standard connection heads: Form B-VA, Dimension see page 2.
- **Protection shell** (fig. 1/3 up to 4) according or similar to DIN 43772.
Standard material 1.4571.
Standard diameter 9 or 11 mm.
- **Process connection** via VA compression fitting or VA union nut, standard thread: G1/2".
- **Measuring insert** (fig.1/2) replaceable according or similar to DIN 43735.
Sensor depending on use:
thin film or ceramic according to IEC / EN 60751,
standard in 1 x 3-, 1 x 4-, 2 x 3-, or 2 x 4 wire circuit.
Operation temperature max. 150°C
Tolerance class according to IEC / EN 60751
Sheath material according to IEC / EN 61515.
Standard material 1.4404,
Standard diameter 3 or 6 mm.
Notice: Sensors with $\varnothing 3$ mm and more than 4 inner conductors, $\varnothing < 3$ mm, $\varnothing > 3$ mm and more than 6 inner conductors are considered to be non-insulated or grounded in accordance with IEC / EN 60079-11 (dielectric strength) and must be connected to equipotential bonding of the system throughout the intrinsically safe circuit for safety reasons, taking into account the special conditions according to IEC / EN 60079-14.
- **Protection shell** (fig. 1/3 bis 4) the following demension are acceptable:
outer diameter(D) $\geq 6,0$ mm, wall thickness(S) $\geq 1,0$ mm, ground hight $\geq 1,3 \times S$ [mm].
nominal length (NL) max. 8000 mm
- **Optional materials for mining explosion protection**
please see operating instructions chapter 4 X-Conditions.

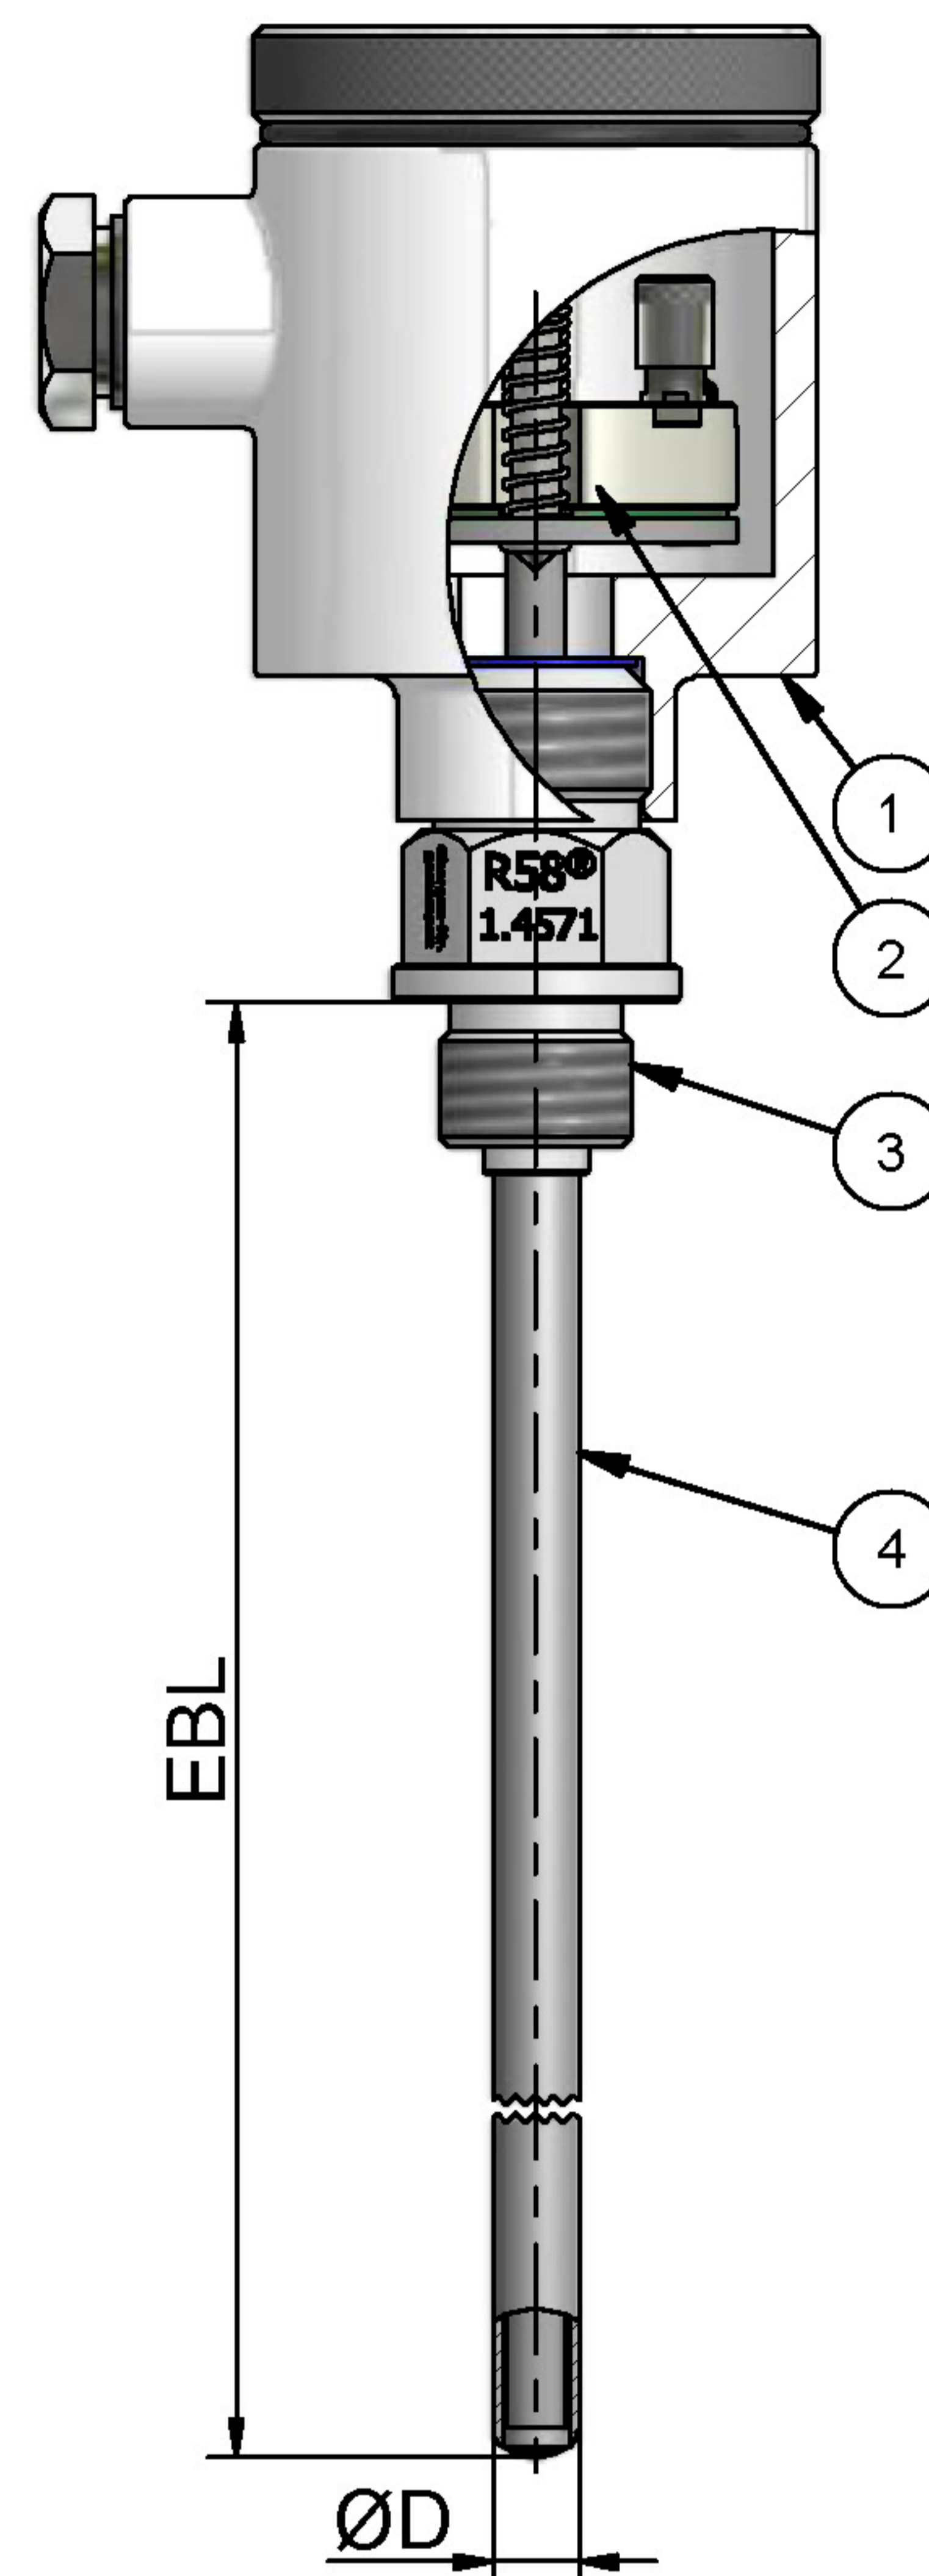


fig. 1

Deviations according to the sensor type

Resistance temperature detector with PT 100 sensor

table 1


class	accuracy in °C		Deviations in °C
	ceramic	thin film	
AA ¹⁾	-50 bis +250	0 bis +150	$\pm (0,1 + 0,0017 \times t)^{2)}$
A	-100 bis +450	-30 bis 300	$\pm (0,15 + 0,002 \times t)^{2)}$
B	-196 bis +600	-50 bis +500	$\pm (0,3 + 0,005 \times t)^{2)}$
C	-196 bis +600	-50 bis +600	$\pm (0,6 + 0,01 \times t)^{2)}$

¹⁾ out of date marking 1/3 DIN, ²⁾ t = unsigned amount of the measured temperature in °C


Source: Technical dates from IEC / EN 60751:2009-05 chapter 5.1.3

connecting head / circuit diagram


Alternative to the cable gland a stainless steel M12 insert plug is possible.

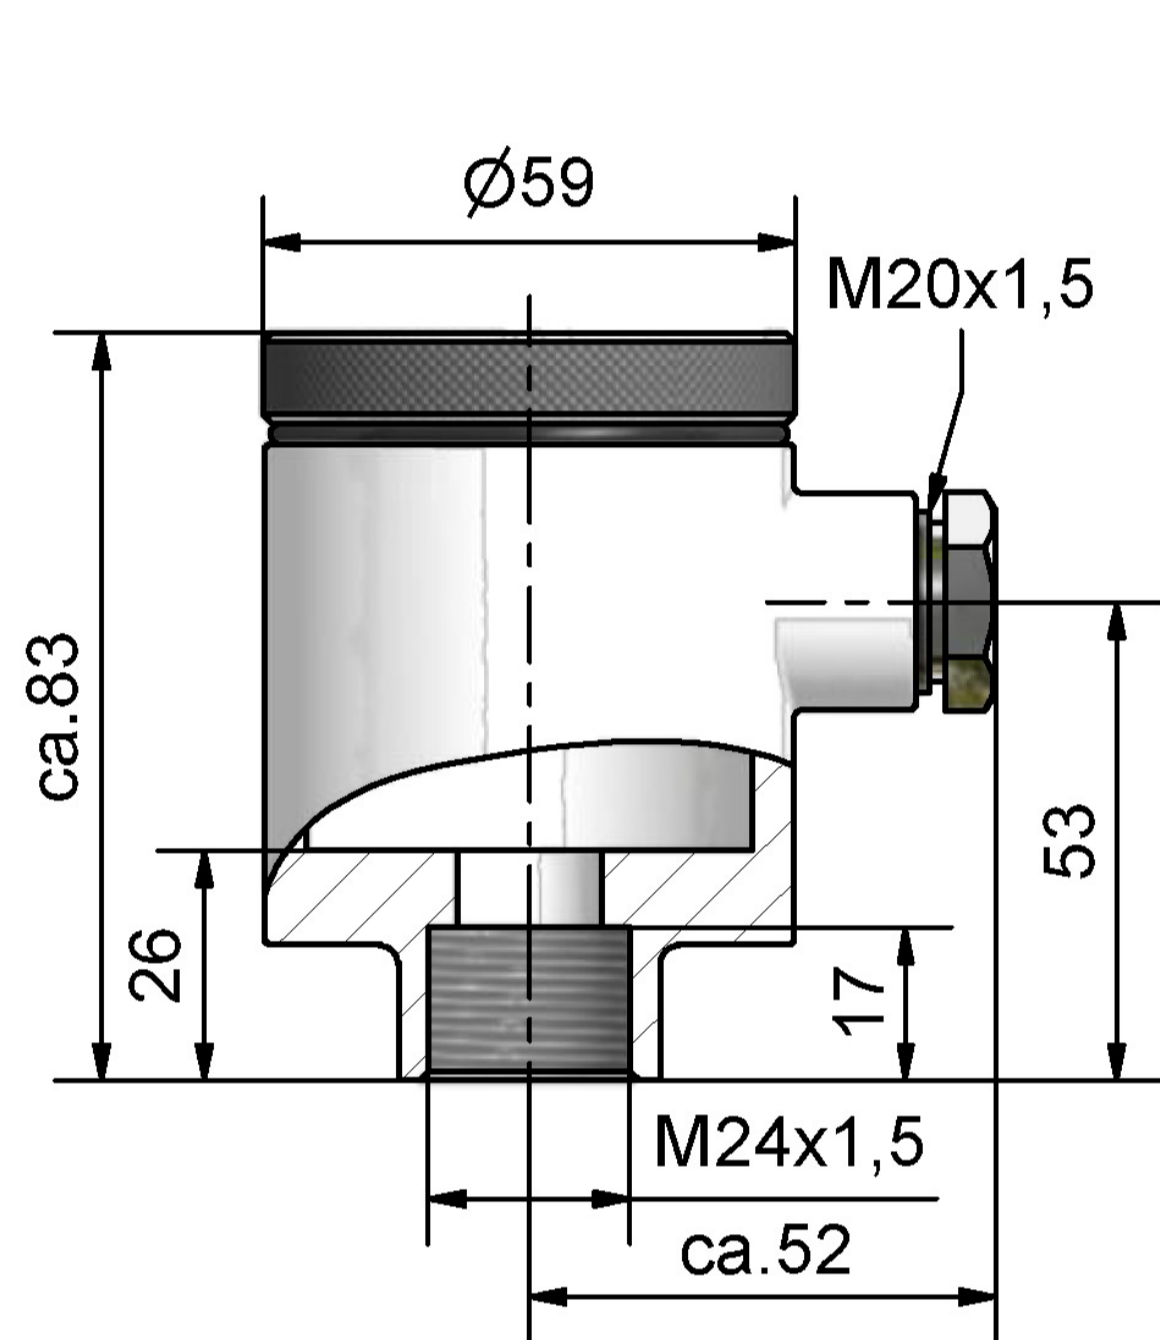


connection head model B-VA
M24 x 1,5

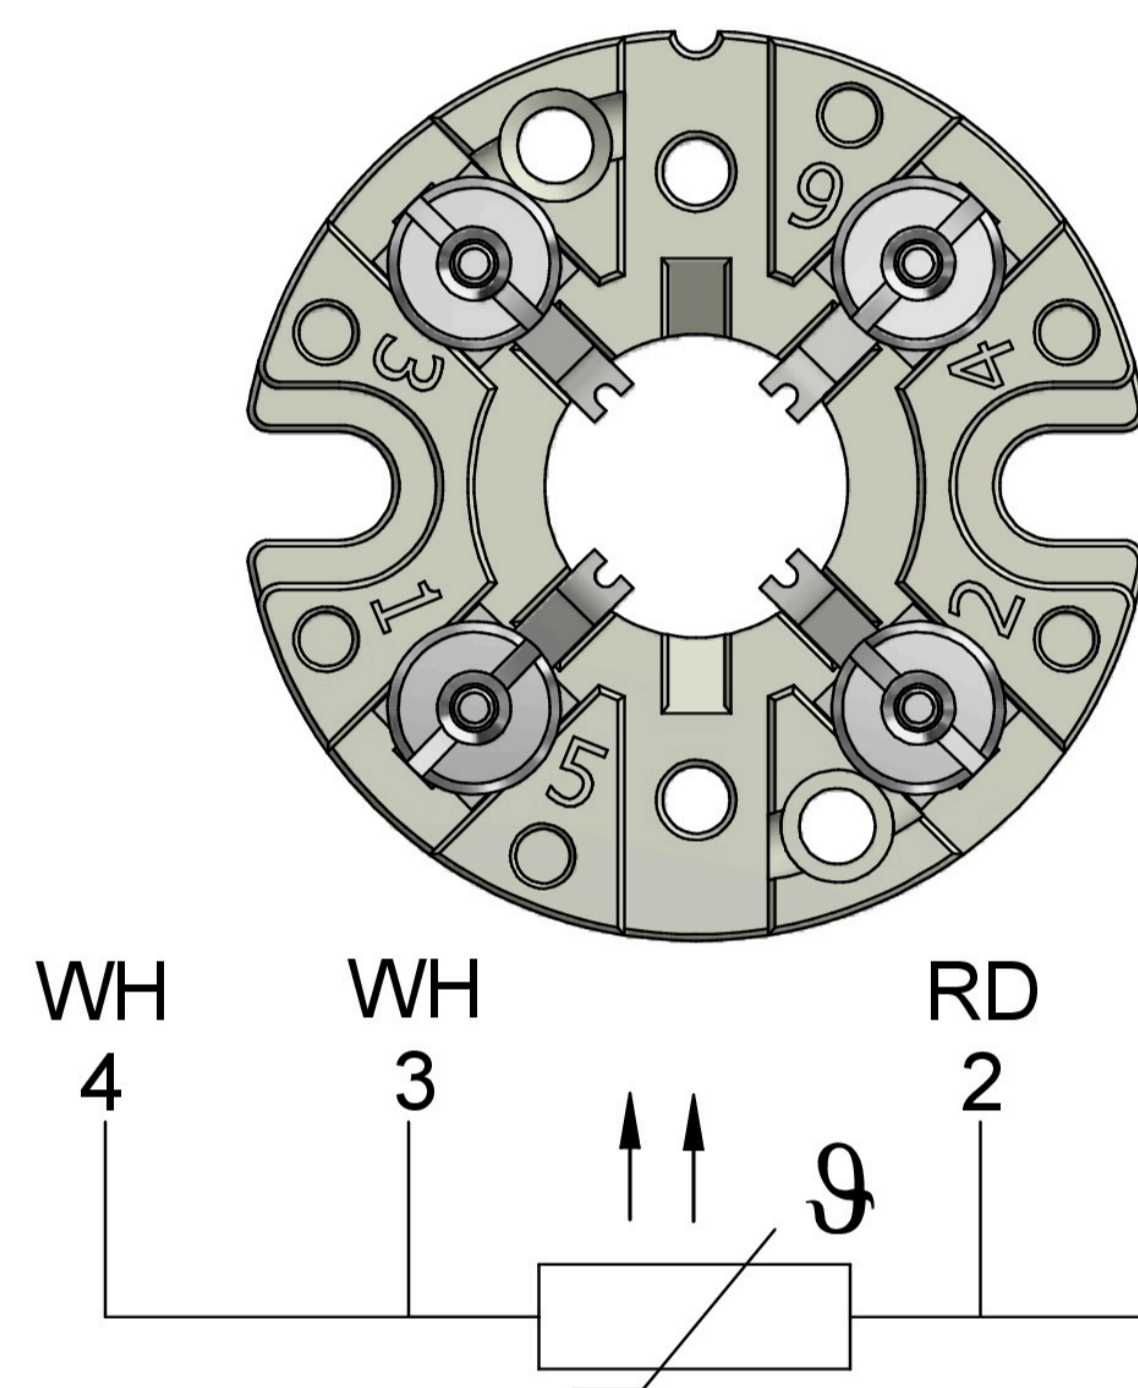


terminal base model B
1 x PT100 4 wire

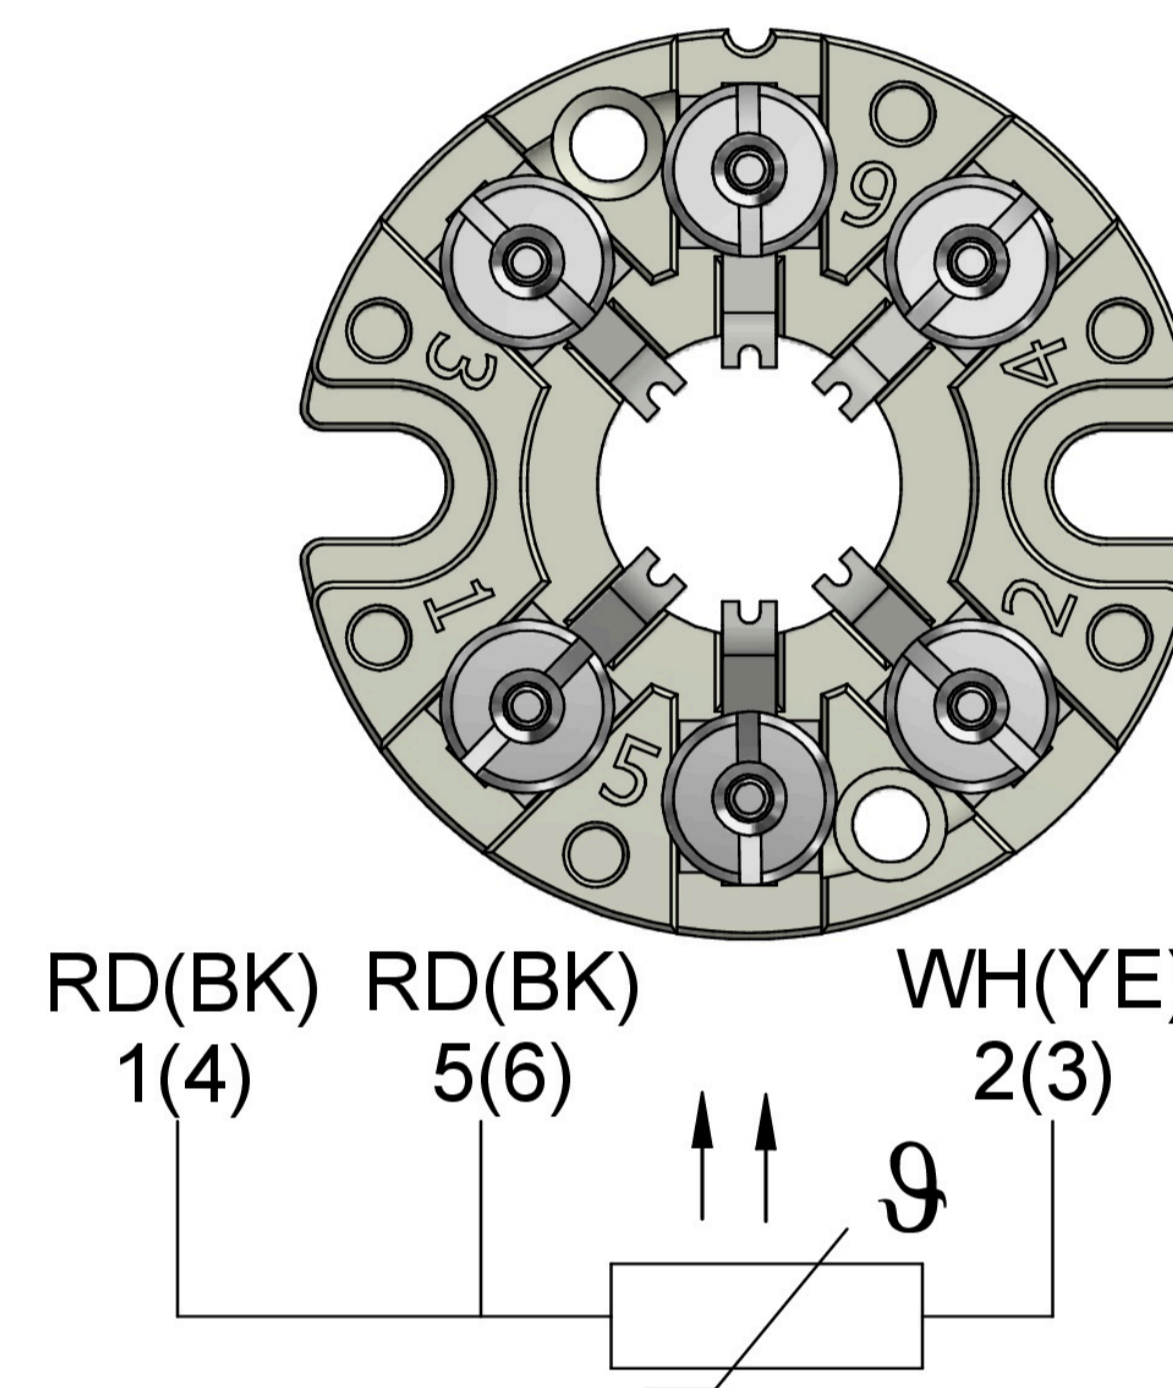


terminal base model B
2 x PT100 3 wire

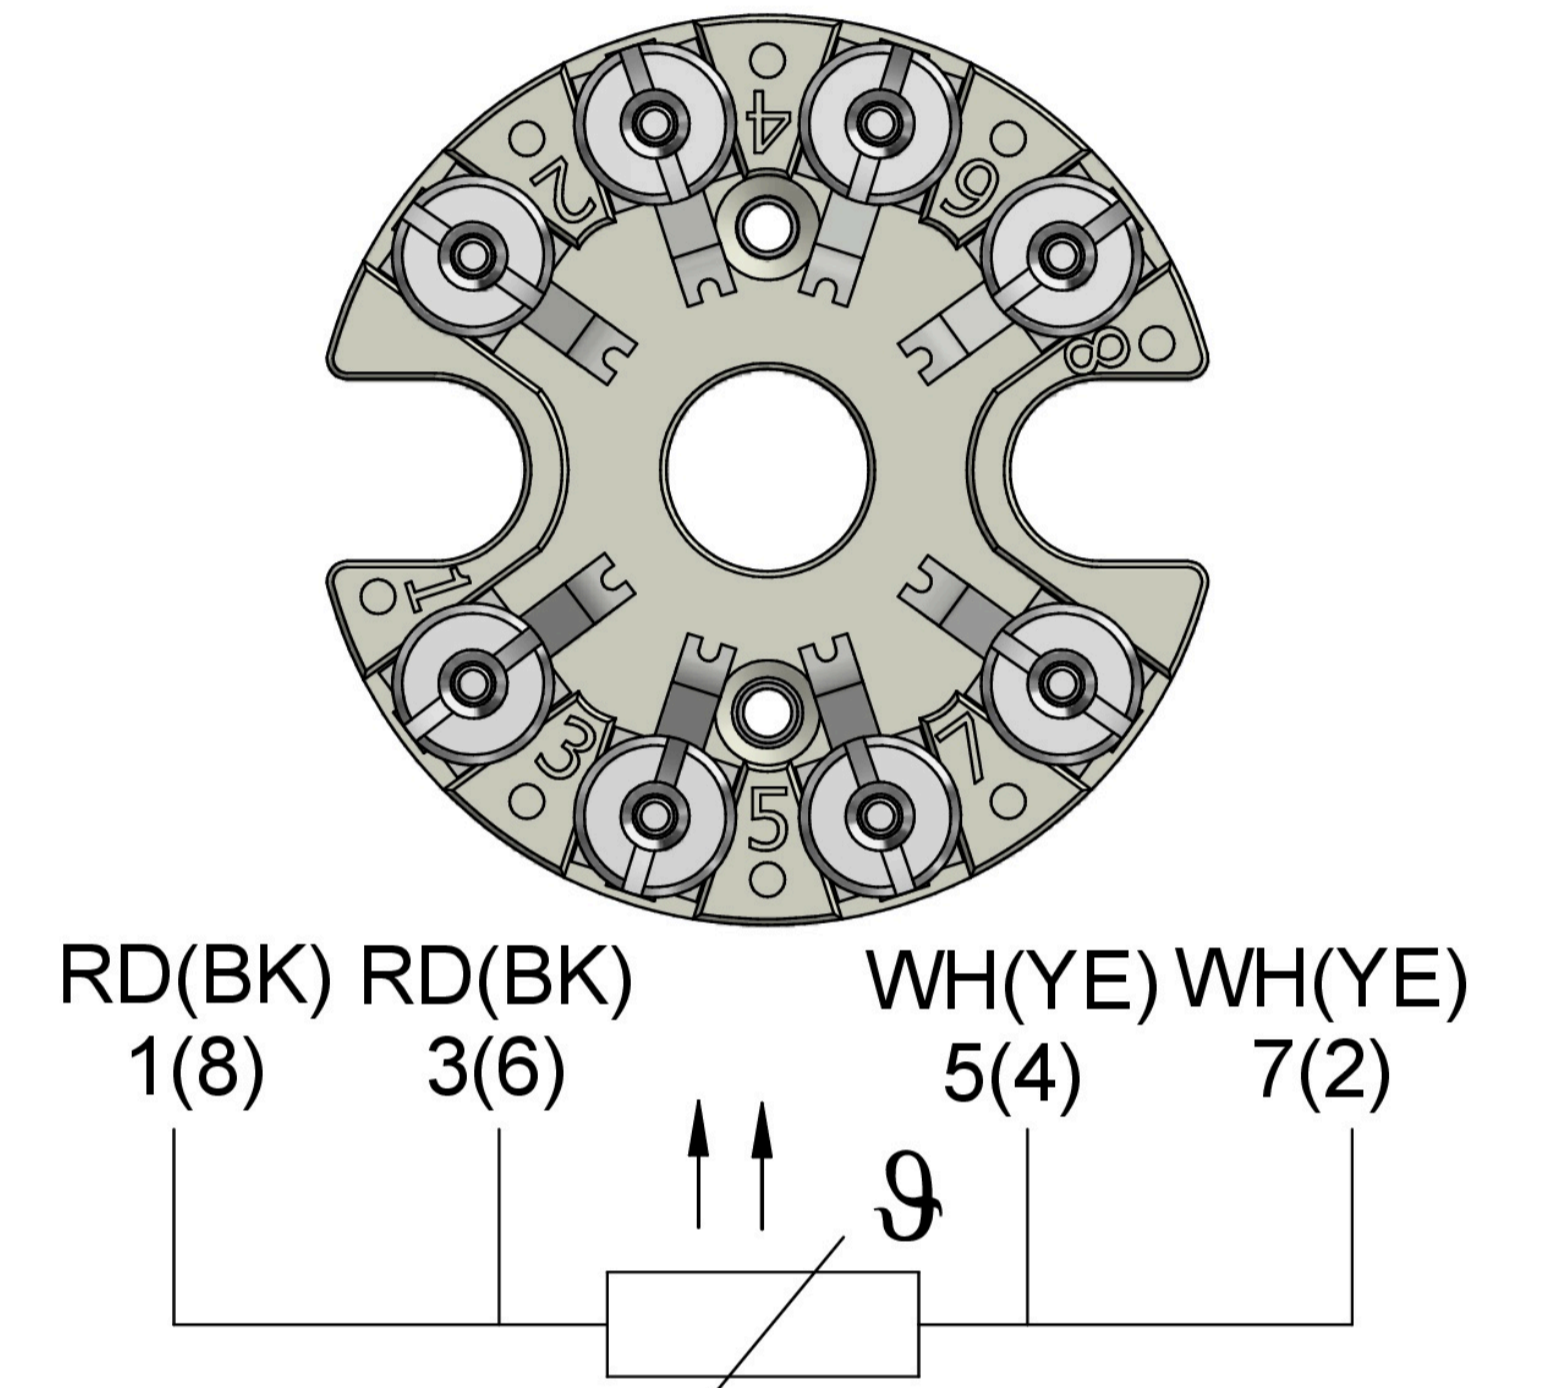


terminal base model B
2xPT100 4-wire

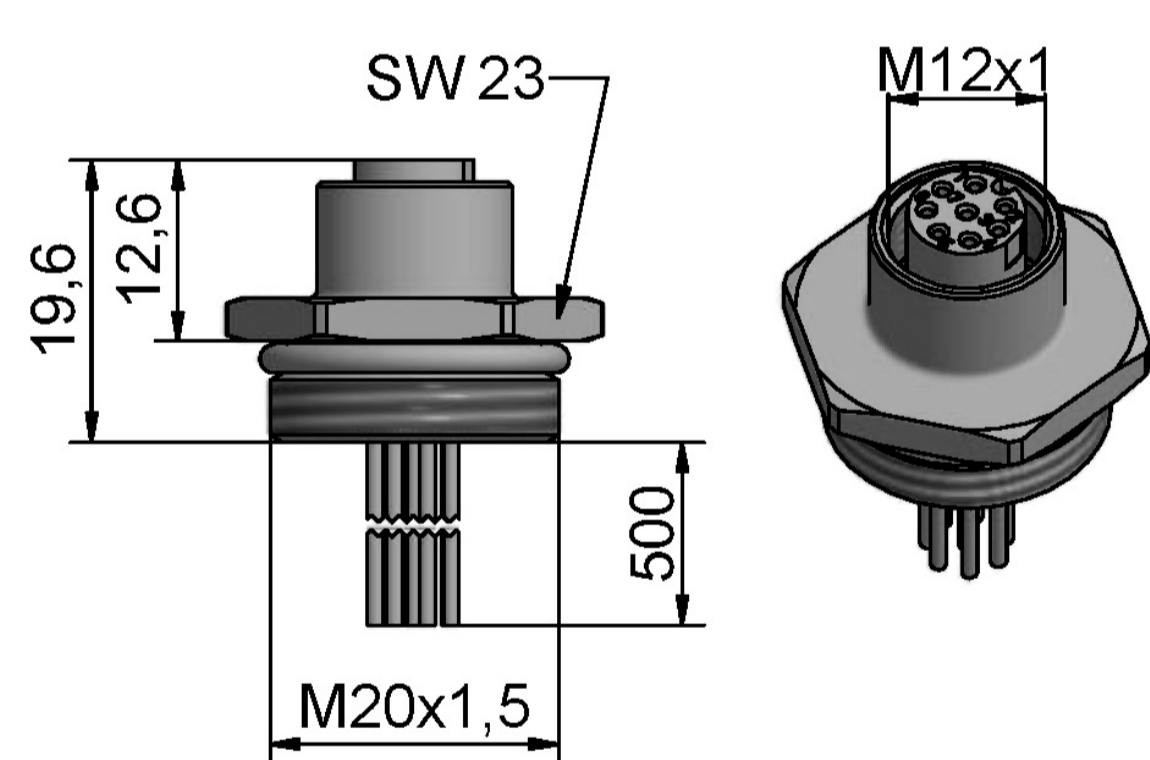


M12 insert socket
8 - terminal, stainless steel

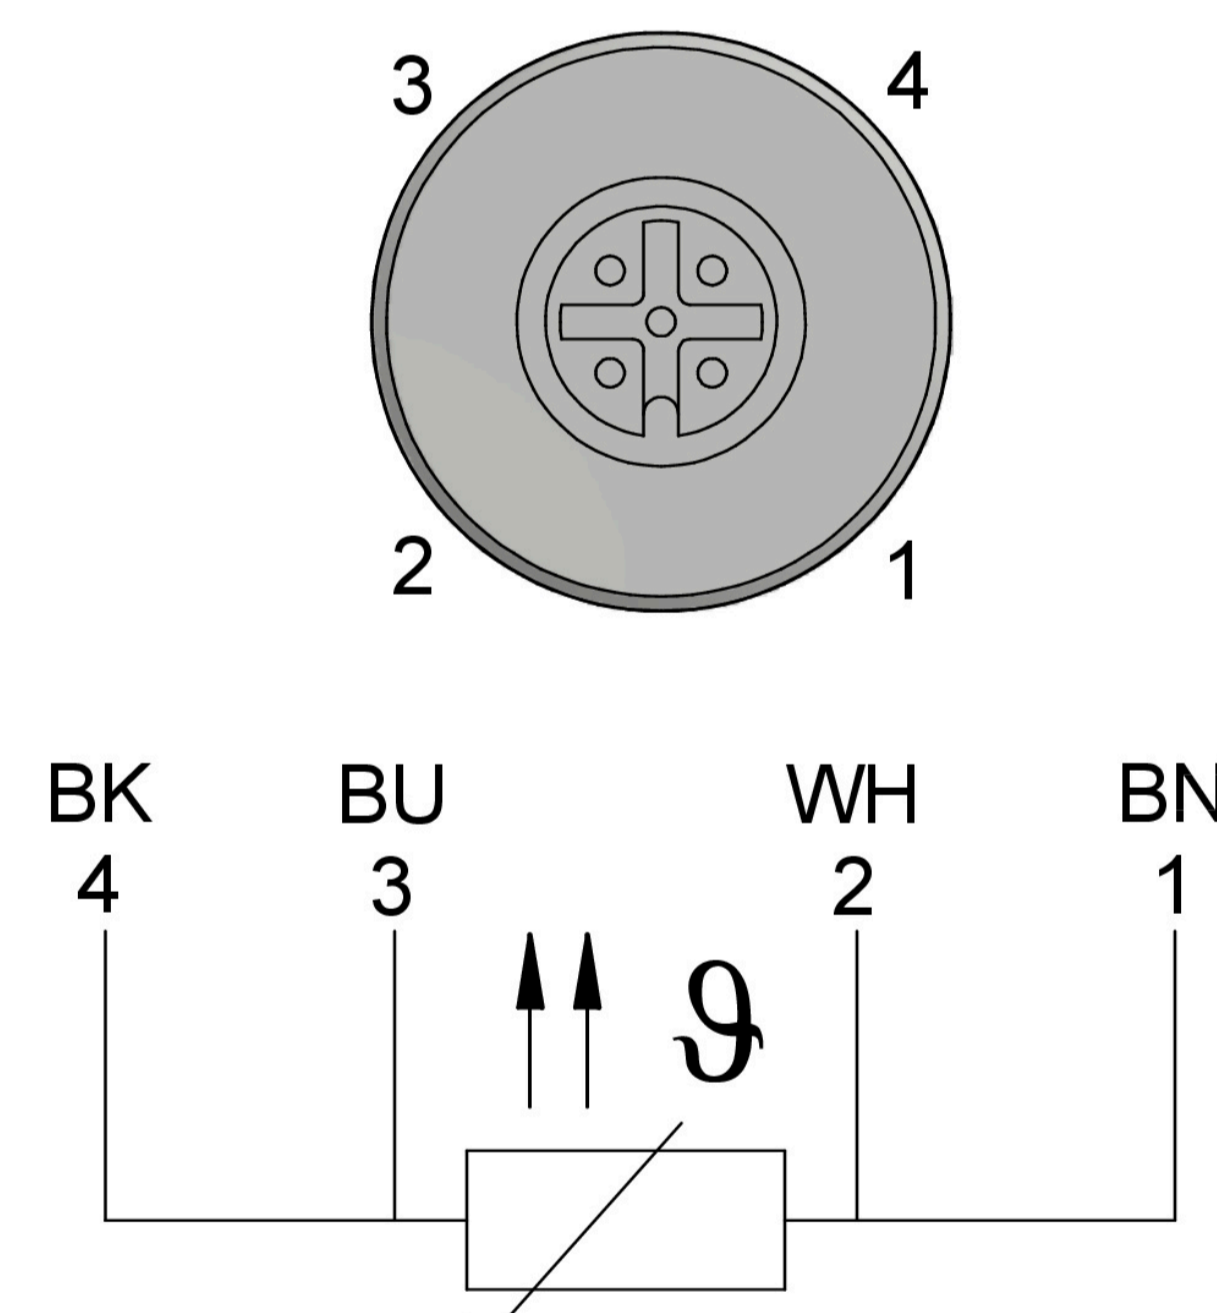

M12 insert socket
1 x PT100 4 wire

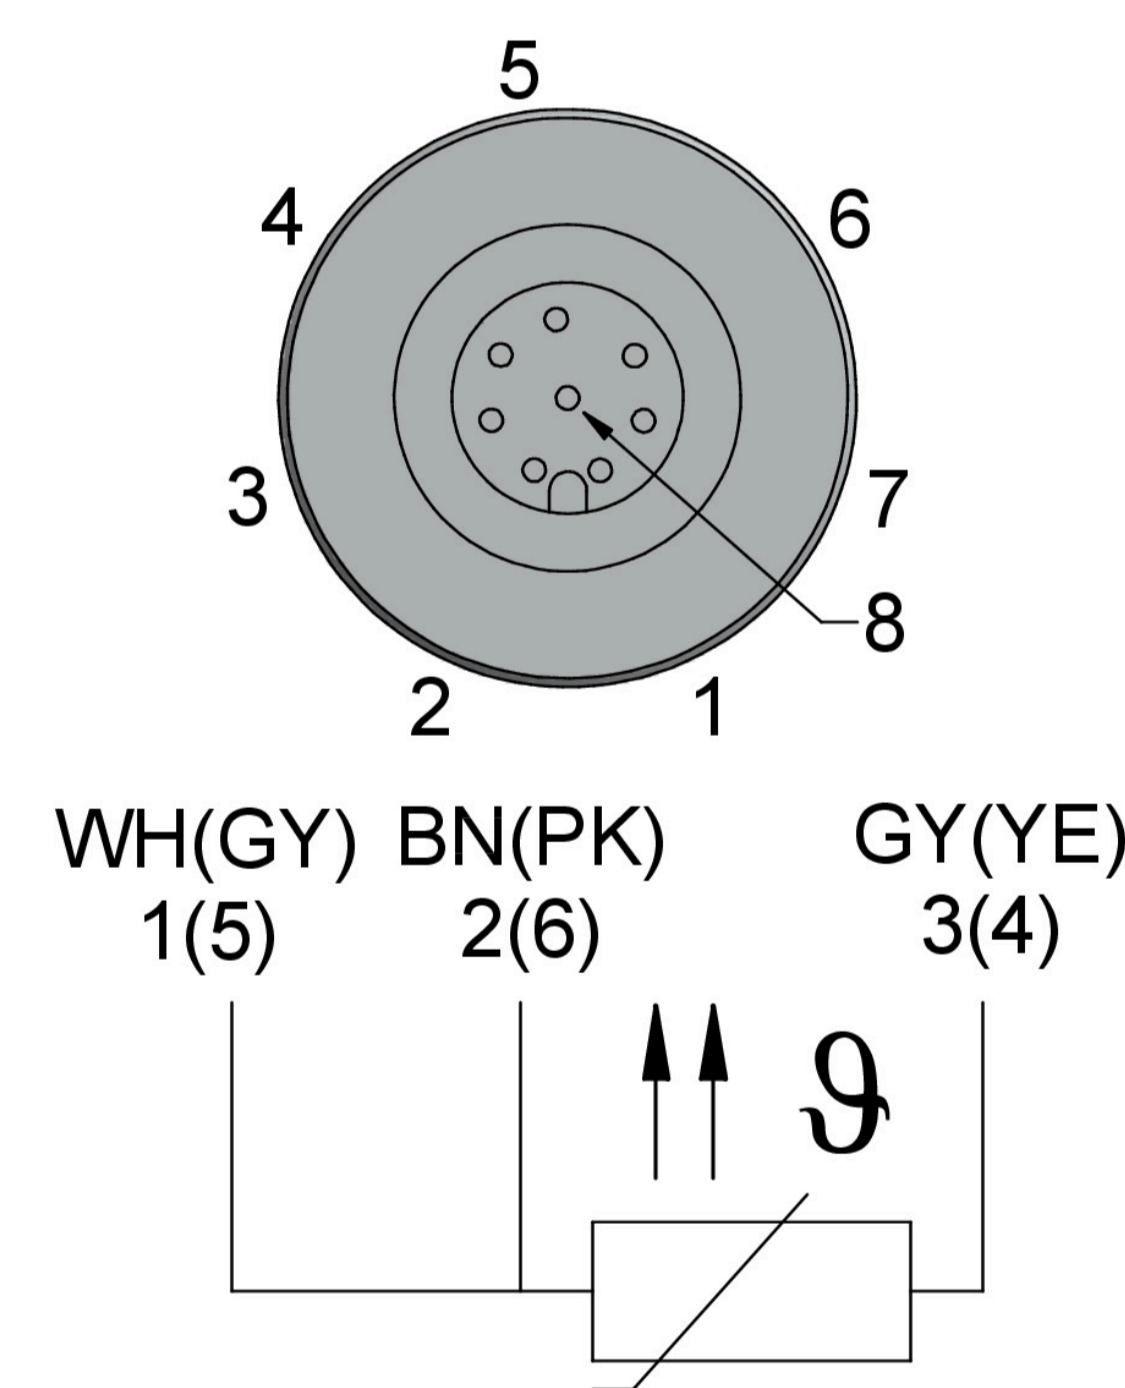

M12 insert socket
2 x PT100 3 wire

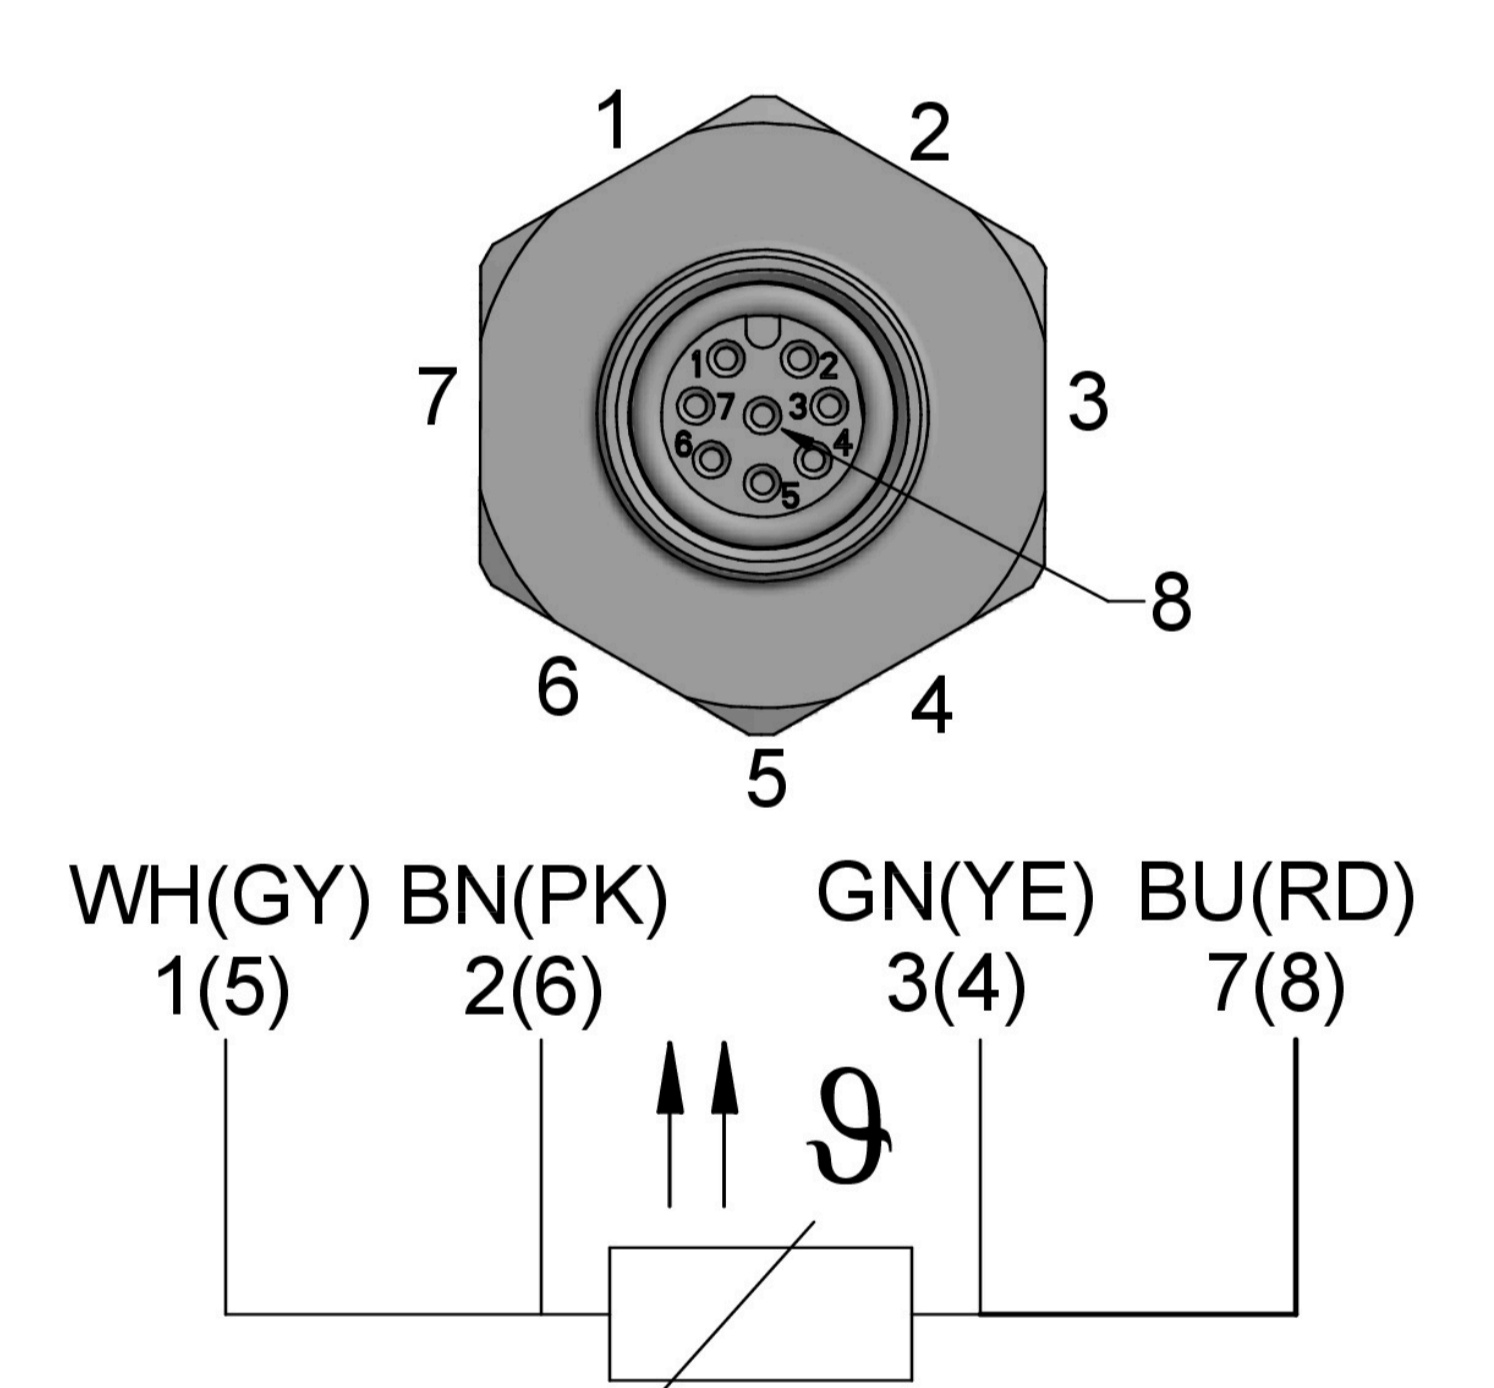

M12 insert socket
2 x PT100 4 wire